


BATTERYcharge SOLAR Cable



Solar-powered battery maintenance for vehicles

Modern vehicles have a small but constant battery drain. They are packed full of electrical systems that are constantly working even when the ignition is not running. Alarms, immobilisers, and lock monitoring are examples of systems running in the background that can cause the battery to discharge even when the vehicle is not being used. The OSPOBD is compatible with OSRAM's OSP500, OSP1000 and OSP2000 Solar Battery Maintainers to allow connection via the vehicle's OBDII port for a more efficient connection rather than through the 12V socket. It provides a permanently 'On' link between a solar panel and your battery for long term battery maintenance.

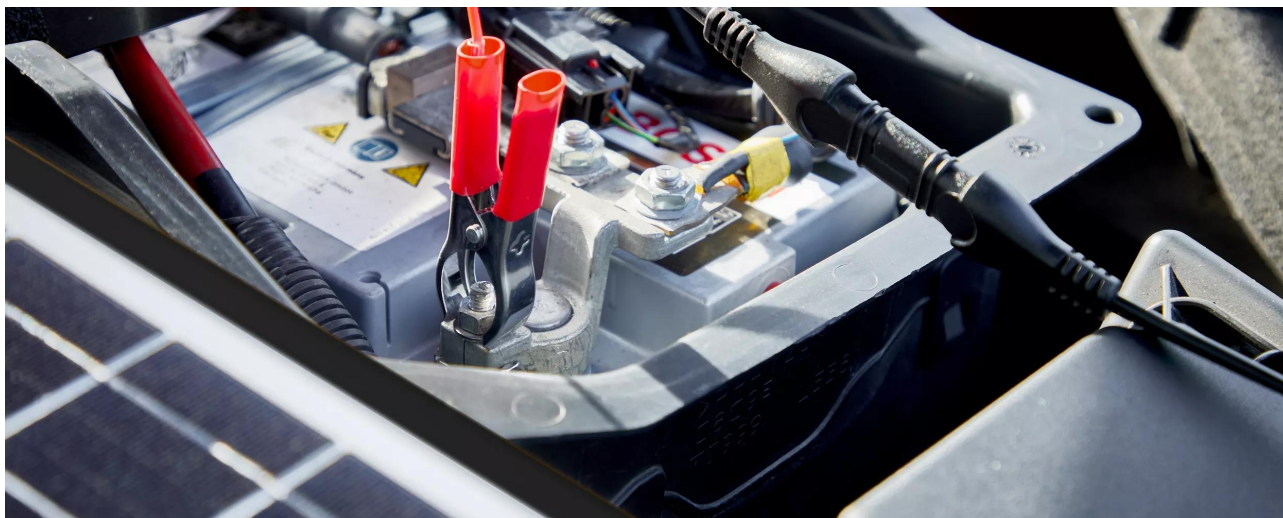

Product family datasheet

Technical data


	Product information	General Product Information	Physical Attributes & Dimensions	
Product description	Application (Category and Product specific)	Global order reference	Length	Width
BATTERY charge SOLAR Cable	Solar battery maintainer cable	OSPOBD	2000 mm	48.0 mm

		Dimensions & weight	Environmental & Regulatory Information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Product description	Height	Power Cable Length	Candidate list substance 1	CAS No. of substance 1
BATTERY charge SOLAR Cable	20.0 mm	2.0 m	Lead	7439-92-1

Product description	Safe use instruction	Declaration no. in SCIP database
BATTERY charge SOLAR Cable	The identification of the Candidate List substance is sufficient to allow safe use of the article.	9ca9aa98-2153-4666-8e81-39160acb07cb

Product family datasheet

Download Data

File	
	User instruction BATTERYcharge

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.