


# LEDDriving FL PSX24W



## Cool White color temperature of 6,000 K

Better visibility in foggy situations with a perfect color match for xenon and LED headlights. Signs, obstacles and hazards can be recognized sooner.

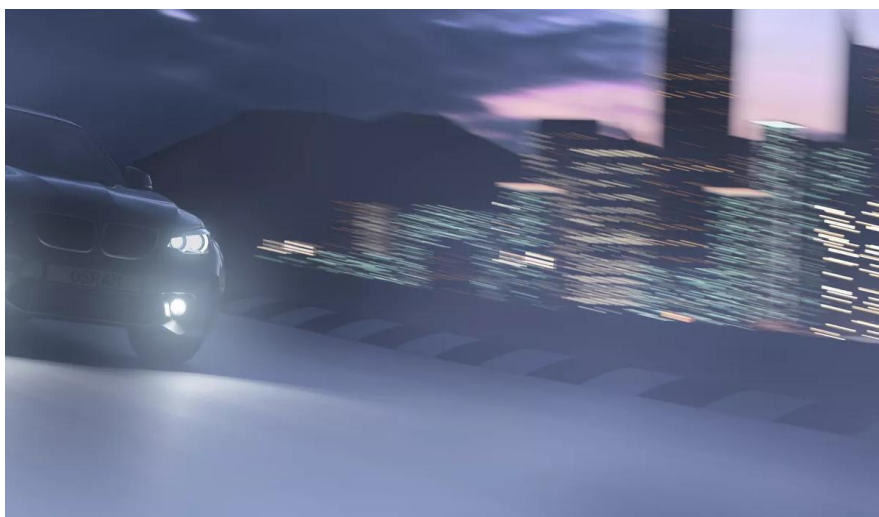

## Superior brightness

More light allows to see farther and therefore react sooner with reduced glaring thanks to an optimized light distribution



## Ultra compact LED replacement for conventional PSX24W fog lamps as socket solution

Easy installation with optimized compatibility

## New OSRAM LED fog lamps to increase safety and performance

The latest generation of OSRAM LED fog lamps provides an even more convenient solution in order to replace and upgrade existing halogen fog lamps with state-of-the-art LED technology. The color temperature of 6,000K provides for a stylish cool white look and improved visibility.



Product family datasheet

Technical data

| Product description               | Product information |                                     |                                                   | Electrical data |                 |              |
|-----------------------------------|---------------------|-------------------------------------|---------------------------------------------------|-----------------|-----------------|--------------|
|                                   | Order reference     | Product type (off-road vs. on-road) | Application (Category and Product specific)       | Nominal voltage | Nominal wattage | Test voltage |
| LEDDriving FL $\triangleq$ PSX24W | 2604CW              | Off-road $\triangleq$ PSX24W        | Mainly used for headlight/ fog light applications | 12.0 V          | 8.20 W          | 13.2 V       |

| Product description               | Photometrical data      |               | Dimensions & weight | Lifespan    |             | Capabilities |
|-----------------------------------|-------------------------|---------------|---------------------|-------------|-------------|--------------|
|                                   | Luminous flux tolerance | Luminous flux | Diameter            | Lifespan B3 | Lifespan Tc | Technology   |
| LEDDriving FL $\triangleq$ PSX24W | $\pm 20$ %              | 730 lm        | 18.0 mm             | 2500 h      | 5000 h      | LED          |

| Product description               | Environmental information<br>Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                                                                                           |                                  |
|-----------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------|
|                                   | Date of Declaration                                                                                | Primary Article Identifier                                                                | Declaration No. in SCIP database |
| LEDDriving FL $\triangleq$ PSX24W | 07-03-2024                                                                                         | 4062172058360  <br>4062172058346  <br>4059089376878  <br>4059089349520  <br>4062172401852 | In work                          |

Download Data

| File                                                                              |                                                           |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------|
|  | Brochures<br>LEDriving Retrofits - Exchange overview (EN) |

Legal advice

These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

LEDriving CANBUS CONTROL UNIT (LEDCBCTRL102) avoids error messages on the board computer when using LED fog lights within 21 W applications

Refer to [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee) for precise conditions

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

